
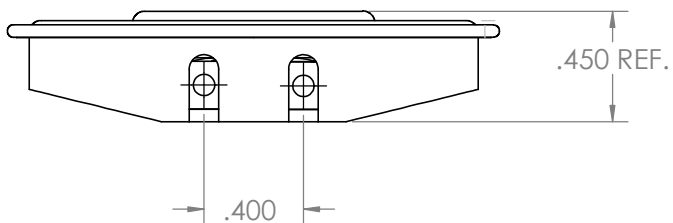
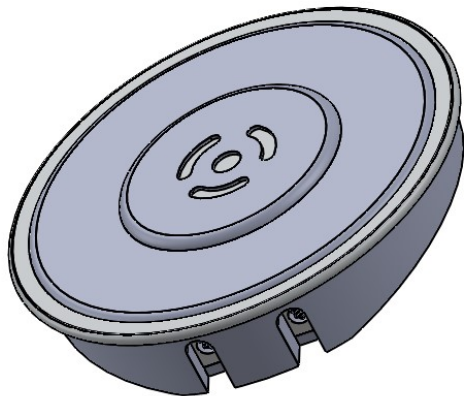


4

3

2

1

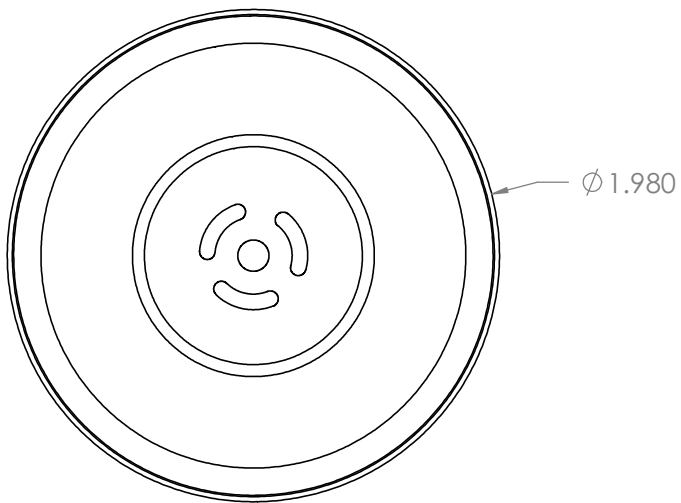

NOTES:

- 1. IMPEDANCE: 1000 OHM @ 1.0kHz
- 2. FREQUENCY RESPONSE: 100Hz TO 3.5kHz
- 3. SENSITIVITY: 105dB MIN. @ 1.0kHz WITH 1mW INPUT
- 4. NSN: 5965-00-135-0506
- 5. SPECIFICATION: MIL-H-49161

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<b>LIVE WIRE LLC</b>
		DIMENSIONS ARE IN INCHES TOLERANCES: $\pm$ /.010 FRACTIONAL $\pm$ ANGULAR: MACH $\pm$ BEND $\pm$ TWO PLACE DECIMAL $\pm$ THREE PLACE DECIMAL $\pm$		DRAWN	MC	
		INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		TITLE:
		MATERIAL		ENG APPR.		EARPHONE ELEMENT
		FINISH		MFG APPR.		1000 OHM
NEXT ASSY	USED ON	APPLICATION		Q.A.		SIZE
		DO NOT SCALE DRAWING		COMMENTS:		DWG. NO.
						<b>B</b> SM-B-933877
						REV
						SCALE: 2:1 WEIGHT:
						SHEET 1 OF 1

4

3

2

1