
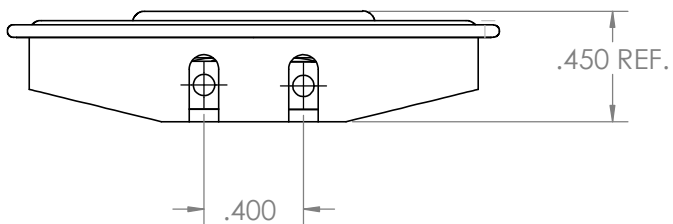
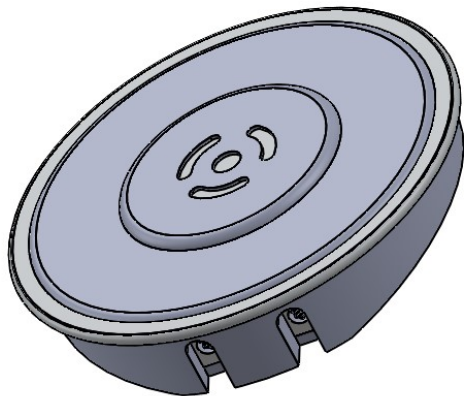


4

3

2

1

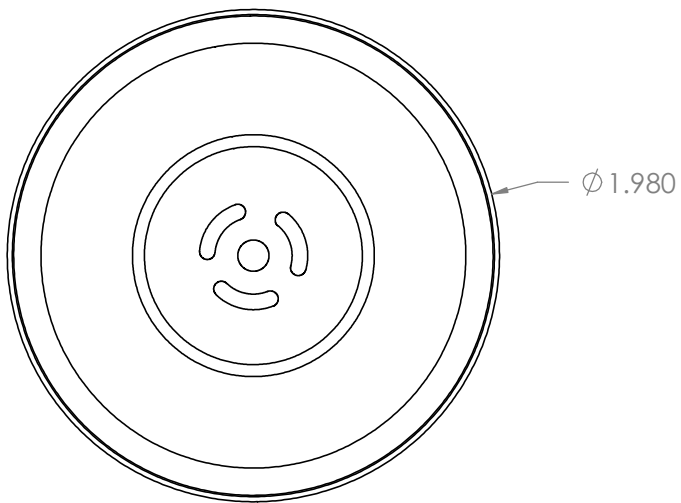

NOTES:

- 1. IMPEDANCE: 19 OHM +/- 2 OHM @ 1.0kHz
- 2. FREQUENCY RESPONSE: 100Hz TO 5.0kHz
- 3. SENSITIVITY: 102dB MIN. @ 1.0kHz WITH 1mW INPUT
- 4. NSN: 5965-01-415-0866
- 5. SPECIFICATION: MIL-PRF-25670/2D

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	LIVE WIRE	
		DIMENSIONS ARE IN INCHES		DRAWN	MC	8-25-21	TITLE:
		TOLERANCES: +/- .010		CHECKED			EARPHONE ELEMENT
		FRACTIONAL ±		ENG APPR.			H-143A/AIC
		ANGULAR: MACH ± BEND ±		MFG APPR.			SIZE DWG. NO. REV
		TWO PLACE DECIMAL ±		Q.A.			B 73B2619
		THREE PLACE DECIMAL ±		COMMENTS:			SCALE: 2:1 WEIGHT: SHEET 1 OF 1
		INTERPRET GEOMETRIC TOLERANCING PER:					
		MATERIAL					
		FINISH					
NEXT ASSY	USED ON	APPLICATION		DO NOT SCALE DRAWING			

4

3

2

1