
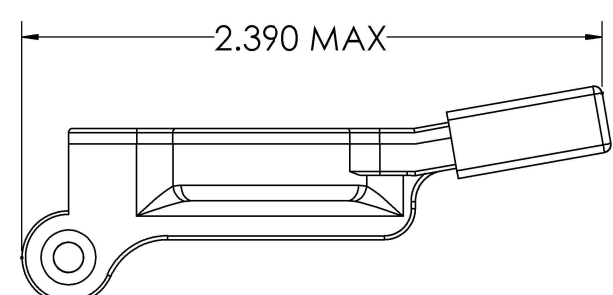
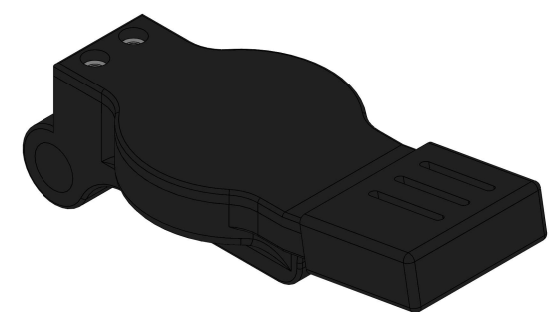


4

3

2

1

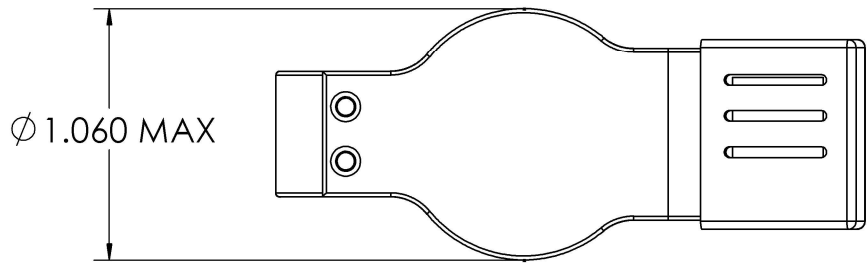

NOTES:

- 1. SPECIFICATION: MIL-PRF-26542F
- 2. SLASH SHEET: MIL-PRF-26542/2E
- 3. SENSITIVITY: 34dB - 40dB / 103 dB INPUT
- 4. TYPE: DYNAMIC
- 5. IMPEDANCE: 5 OHM +/- 1.0 OHM
- 6. FREQUENCY RESPONSE: 200 Hz - 6.0kHz
- 7. ALTITUDE COMPENSATING
- 8. COLOR: BLACK
- 9. MATES: U-173/U CONNECTOR

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	LIVE WIRE TITLE: MICROPHONE DYNAMIC M-87/AIC			
		DIMENSIONS ARE IN INCHES		DRAWN	MC			10-19-21	
		TOLERANCES:		CHECKED					
		FRACTIONAL ±		ENG APPR.					
		ANGULAR: MACH ± BEND ±		MFG APPR.					
		TWO PLACE DECIMAL ±		Q.A.			SIZE	DWG. NO.	REV
		THREE PLACE DECIMAL ±		COMMENTS:			B	M87_AIC-LW	—
		INTERPRET GEOMETRIC TOLERANCING PER:					SCALE: 2:1	WEIGHT:	SHEET 1 OF 1
		MATERIAL							
		FINISH							
NEXT ASSY		USED ON							
APPLICATION		DO NOT SCALE DRAWING							

4

3

2

1