
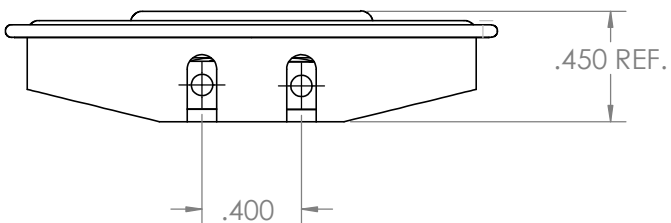
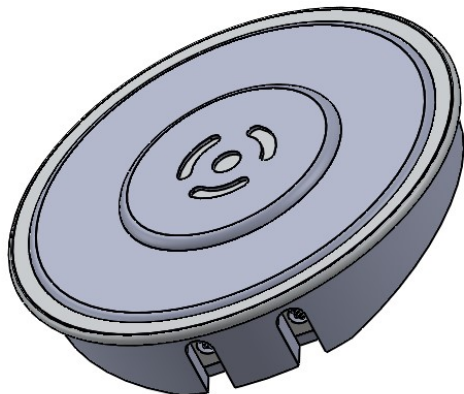


4

3

2

1

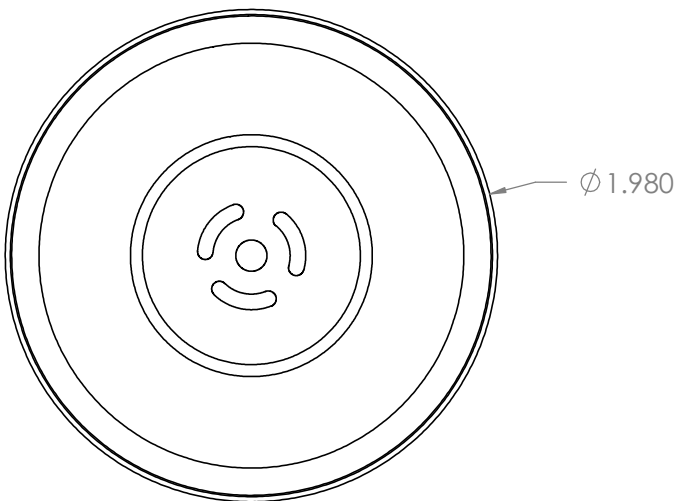

- NOTES:
1. IMPEDANCE: 19 OHM +/- 2 OHM @ 1.0kHz
  2. FREQUENCY RESPONSE: 100Hz TO 5.0kHz
  3. SENSITIVITY: 102dB MIN. @ 1.0kHz WITH 1mW INPUT
  4. NSN: 5965-00-615-0104
  5. SPECIFICATION: MIL-PRF-25670/2

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<b>LIVE WIRE LLC</b>	
		DIMENSIONS ARE IN INCHES TOLERANCES: +/- .010		DRAWN	MC	12-10-18	TITLE:
		FRACTIONAL ±		CHECKED			H-143/AIC
		ANGULAR: MACH ± BEND ±		ENG APPR.			EARPHONE ELEMENT
		TWO PLACE DECIMAL ±		MFG APPR.			SIZE DWG. NO. REV
		THREE PLACE DECIMAL ±		Q.A.			<b>B</b> 69B2032
		INTERPRET GEOMETRIC TOLERANCING PER:		COMMENTS:			SCALE: 2:1 WEIGHT: SHEET 1 OF 1
		MATERIAL					
NEXT ASSY		USED ON					
		FINISH					
APPLICATION		DO NOT SCALE DRAWING					

4

3

2

1